Front Side

Troubleshooting

Problems	Possible causes	Solutions
The battery was charged for a long time but the LED is still red, not green.	1. The charging time is not sufficient. 2. The AC adapter of the battery malfunctions.	1. Charge the battery more than 8 hours continuously. 2. Contact after-sales service or distributor.
The battery cannot charge any other devices.	1. The device is switched off. 2. Malfunction of the charging cable. 3. Device not properly connected.	1. Charge the battery again. 2. Exchange the charging cable. 3. Ensure correct connection.
Battery is fully charged, but cannot charge any other devices.	1. Protective circuit has kicked in. 2. Battery empty.	Charge the battery again.

Back Side

Thank you for purchasing our product.
Please read the use instructions carefully.

Getting Started

Please charge the CasePower Smart Power Booster until the LED lights up. Notice: Please charge it fully if used for the first time. Please allow 4-6 hours for a full charge.

Charging Your Device

Connect your device via the charging cable; the device will recognize the charger and intelligent charging starts automatically. If no device is recognized, it will switch off after 30 seconds.

Installation

First step: Charging the battery

Charge the battery via the charging cable provided with the CasePower Smart Power Booster. Connect one USB connector to the CasePower Smart Power Booster and the other USB connector to your computer or an AC power source with USB 5V input. When charging the LED lights up red until the device is fully charged. After a full charging cycle the LED lights up green.

Different ways to charge the CasePower Smart Power Booster
Charge via your computer:

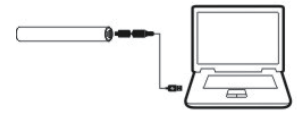

Charge via your AC adapter:

AC adapter not included

Charge in your car:



Car adapter not included

* *Note: Please charge the battery every 3 months and keep it clean and dry.*

Second step: Charging your device
Now that the CasePower Smart Power Booster is charged you can start using it to charge your iPhone/smartphone and other devices. Connect the USB cable to the CasePower Smart Power Booster and one of the three included tips to your device.

* *(iPhone 5 users: please use the cable provided with your iPhone and connect the USB cable to the CasePower Smart Power Booster and the 8-pin tip (Lightning) to your iPhone 5.)*

Back Cover

CasePower®
EMPOWERING THE SMART GENERATION

www.case-power.com.

RoHS COMPLIANCE

RoHS Compatible

Front Cover

CasePower®
EMPOWERING THE SMART GENERATION

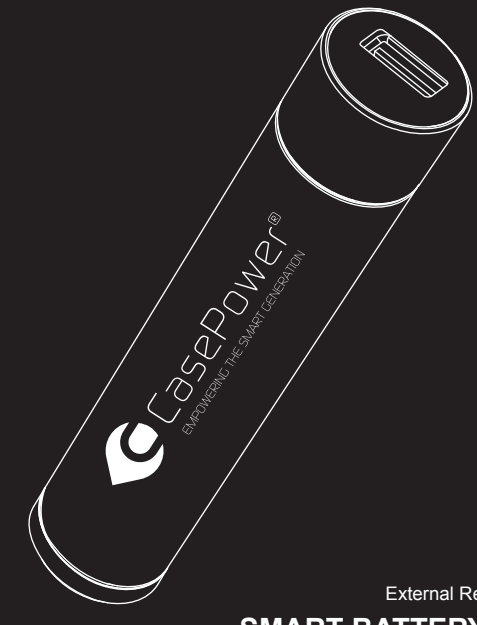

Model: A17
External Rechargeable Battery

SMART BATTERY BOOSTER

Specifications

Battery cell type:	**2600 Lithium-ion cell**
Cycle life:	**More than 500 cycles**
Capacity:	**2600mAh**
Input:	**DC5V/1A**
Output:	**DC5V/0.8A**
Charging time:	**Approximately 8 hours**
Working temperature:	**-5°C ~ +60°C**

LED Indicators

1. **When charging: LED lights up green**
2. **If approximately 10% capacity is left the green LED will start flashing; after flashing for approximately 1 or 2 minutes it will light up red. When switched off the red LED will turn off.**
3. **When charging the battery the LED will light up red; it will turn green when fully charged.**

Caution

- **Do not drop, strongly impact, disassemble or attempt to repair the battery yourself.**
- **Do not immerse the battery in water or let it get wet.**
- **Do not expose the battery to fire, extreme heat or high temperatures.**
- **Read this user manual carefully before use. Any damage caused by misuse is excluded from the warranty.**
- **Dispose of the battery at a recycling station to avoid pollution.**

size: 100x120, paper: 157gsm matt art paper